

# Quick Start Guide


## 1 Connect Cable



+




+



Switch toggle to Cable




G /  / BT

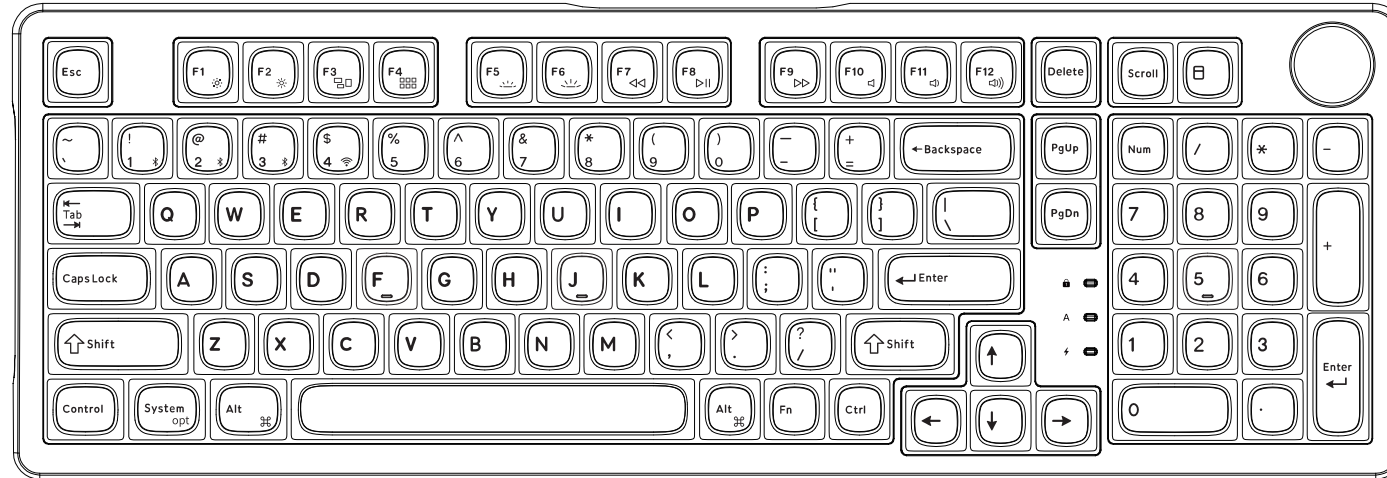


## 2 Connect Bluetooth



Switch toggle to Bluetooth




Press fn + 1 (for 3 seconds) and pair with device named Keychron J3 SE.




fn + 1

### 3 Connect 2.4GHz Receiver


Switch toggle to 2.4GHz mode



Press fn + 4 (for 3 seconds)




Connect the 2.4GHz receiver to the device USB port.




### 5 The Backlight

Press fn + Q to change the lighting effect

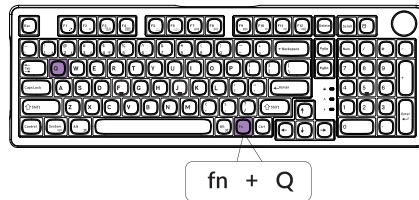

Press fn + tab to turn the backlight on/off

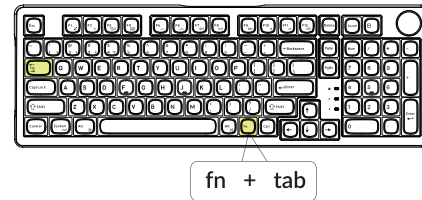

### 7 The Keychron Launcher App

Please visit [launcher.keychron.com](https://launcher.keychron.com) to use the online Launcher web app to remap the keys, create macro commands, or flash the firmware. If the Launcher cannot recognize your keyboard, please reach our support to get the instructions.




\*The online Launcher app can only run on the latest version of Chrome, Edge, and Opera browsers yet.

### 4 Switch To The Right System


Please switch the keyboard to the same system as your computer's operating system.

Press fn + Caps Lock (for 3 seconds) to Switch Mac / Win

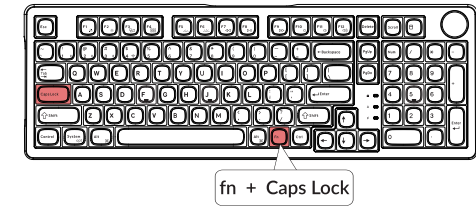


### 6 Adjust The Backlight Brightness

Press fn + W to increase the backlight brightness

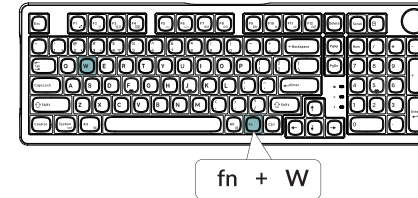

Press fn + S to decrease the backlight brightness


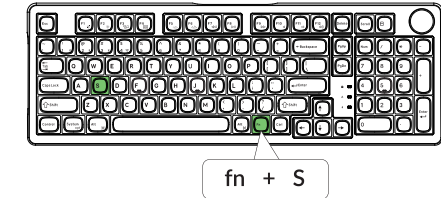


### 8 The Layers


There are four layers of key settings on the keyboard. The layer 0 and layer 1 are for the Windows system. The layer 2 and layer 3 are for the Mac system.

If your system is switched to Windows, then the layer 0 will be activated.

If your system is switched to Mac, then the layer 2 will be activated. Remember that if you are using it in Mac mode, please make changes to the layer 2 instead of the top layer (the layer 0). This is a common mistake people are making.



### 9 Factory Reset & Firmware Update



#### Troubleshooting? Don't know what's going on with the keyboard?

##### Factory reset your keyboard

1. Power on your keyboard.
2. Press and hold fn + J + Z (for 4 seconds). The keyboard backlight will flash in red quickly for 3 seconds, indicating that the keyboard has been reset.

##### Flash your keyboard firmware

1. Visit [launcher.keychron.com](https://launcher.keychron.com) to open the online Launcher web app.
2. Ensure the keyboard is in Cable or Wired mode and plug in the power cable.
3. Find the 'Firmware Update' tab on the left side of the Launcher and connect your keyboard with it.
4. Follow the instructions on the Launcher and complete the firmware update.

\*Step-by-step guide, search the keyword "firmware" on [keychron.com](https://keychron.com).

### 10 Warranty

The keyboard is highly customizable and easy to be rebuilt. If anything goes wrong with any of the keyboard components during the warranty period, we will only replace the defective parts of the keyboard, not the whole keyboard.

